

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/019730 A1(51) International Patent Classification⁷: A47B 85/04,
A47C 13/00(21) International Application Number:
PCT/IB2003/000158

(22) International Filing Date: 23 January 2003 (23.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
6513 2 September 2002 (02.09.2002) BG
107294 19 November 2002 (19.11.2002) BG(71) Applicant (for all designated States except US): ORT
JOINT-STOCK COMPANY [BG/BG]; Kr. Sarafov St.
27, 1421 Sofia (BG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): MILINOV, Ilian
Vladimirov [BG/BG]; Mladost 3, Block 364, Entr.3,
App.65, 1712 Sofia (BG). DANTCHEV, Anton Kolev
[BG/BG]; Vasil Levski Blvd., 52, 1000 Sofia (BG).(74) Agent: CHRISTOVA, Iskra Vladimirova; Iskra Chris-
tova & Partners, Lyuben Karavelov St., 20, 1000 Sofia
(BG).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SK,
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,
ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to the identity of the inventor (Rule 4.17(i)) for all des-ignations
- as to the identity of the inventor (Rule 4.17(i)) for all des-ignations
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: ITEM OF TRANSFORMABLE FURNITURE

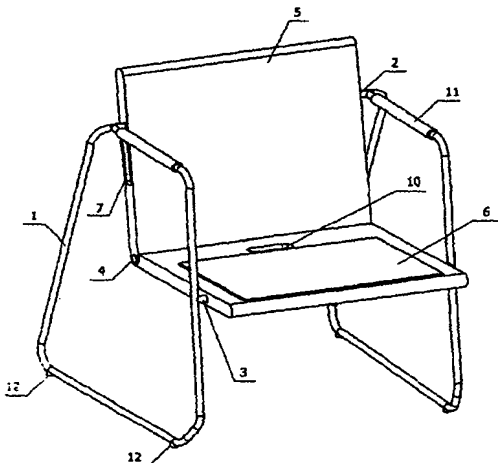

A

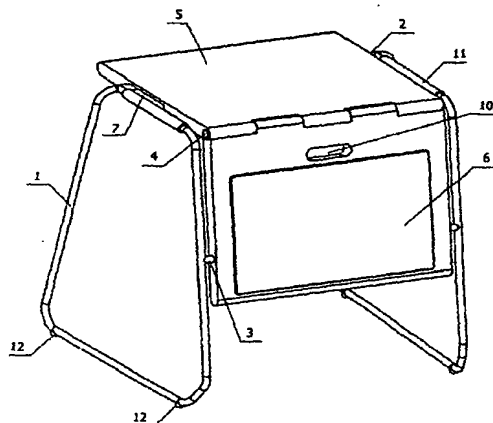

B

(57) Abstract: The invention relates to an item of transformable furniture, in particular to a chair that transforms into a desk and vice versa. An item of transformable furniture consisting of two substantially flat elements (5) and (6) connected with each other, which can switch over between a first position as a seat (6) and a back (5) and a second position as a front panel (6) and a worktop (5) and vice versa. The item of transformable furniture is provided with a supporting construction for the two substantially flat elements (5), (6). The supporting construction consists of two linked lateral vertical elements (1) located at a distance from one another, where the two substantially flat elements are located between the two linked lateral vertical elements (1).

WO 2004/019730 A1



Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ITEM OF TRANSFORMABLE FURNITURE

The invention relates to an item of transformable furniture, in particular to a chair that transforms into a desk and vice versa. Its application is in the furniture industry and can be used for example in conference rooms, offices, training rooms, the home and public areas.

The object of the invention is to provide an item of furniture, in particular a chair that transforms into a desk and vice versa, said furniture having a simple construction that ensures stability as well as easy and simple transformation.

The object of the invention is achieved by the combination of the features defined in claim 1. Preferable embodiments of the furniture according to the invention are set forth in the subclaims.

According to an embodiment of the invention there is provided a chair that transforms into a desk, consisting of two substantially flat elements connected with each other, which switch over between a first position as seat and back and a second position as a front panel/face surface and worktop, respectively. The two substantially flat elements upon switching over from a first position to a second position and vice versa fall essentially in the same plane.

A preferable embodiment of the chair provides two connected substantially flat elements mounted on a supporting construction, consisting of two linked lateral vertical elements, located at a distance from one another. In the space limited by the two lateral vertical elements there are arranged two substantially flat elements. In the form of a chair the first substantially flat element of the furniture forms a back, whereas in the form of a desk the first substantially flat element moves in another substantially horizontal position where it forms a worktop. In the form of a chair the second substantially flat element of the

furniture forms a seat, whereas in the form of a desk the second substantially flat element moves in another substantially vertical position where it forms a front panel of the desk.

In another preferred embodiment of the invention, the supporting construction has two parallel horizontal axes located at different levels, said axis being fixed permanently to two lateral vertical elements. The two substantially flat elements are linked with a hinge joint whose axis is parallel to the horizontal axes. The first substantially flat element is connected with the top horizontal axis by means of a slot, or a mechanism which enables the substantially flat element to make a rotating and translation movement against the axis. The second substantially flat element is connected with the bottom horizontal axis, whereby the latter goes through the former, or the flat element lying on top of the axis, or by means of a mechanism which enables the substantially flat element to make a rotating motion against the axis. In an alternative option, the second substantially flat element is connected with the bottom horizontal axis by means of a slot, or a mechanism, whereby the second substantially flat element makes a rotating and translation movement against the bottom horizontal axis, while the first substantially flat element is connected with the top horizontal axis, whereby the axis goes through the substantially flat element, or the substantially flat element lies on top of the axis, or by means of a mechanism, allowing the substantially flat element to make a rotating movement against the axis. In the transformation from position chair into position desk, from its vertical or nearly vertical position, the first substantially flat element-back is positioned in horizontal or nearly horizontal position as a desk top, while the second substantially flat element -seat, from horizontal or nearly horizontal position, is positioned into vertical or nearly vertical position as a front panel.

In the form of a chair the first substantially flat element and the second substantially flat element of the furniture preferably form an angle between 80° and 130° , more preferably an angle between 100° and 105° . Here the bottom horizontal axis connects the two lateral vertical elements in a place that determines the height of the position of the second substantially flat element, which is a seat, in relation to the floor.

In the form of a desk the first substantially flat element and the second substantially flat element of the furniture preferably form an angle between 80° and 130° , more preferably an angle between 100° and 105° . Here the top horizontal axis connects the two lateral vertical elements in a place that determines the height of the position of the first substantially flat element, which is the desk top, in relation to the floor.

According to a still preferred embodiment one of the horizontal axes can consist of two half-axes mounted on the substantially flat element.

In the process of transformation the hinge joint ensures a smooth change of the position of the two substantially flat elements in relation to each other: increasing the angle formed between the substantially flat elements, and vice versa. In the process of transformation the slot ensures the translation movement of the substantially flat element it is located in, or which contains the mechanism, respectively, in relation to the respective horizontal axis during the rotation of each substantially flat element around the horizontal axis connected with it, and the transition of the substantially flat element from vertical or nearly vertical position in horizontal or nearly horizontal position, and vice versa. In the form of a chair the axis of the hinge joint is on the same or nearly the same level with the bottom horizontal axis. During the transformation into a desk, the axis of the hinge joint moves to one and the same or nearly the same level with the top horizontal axis. The positions of the top and bottom horizontal axes remain unchanged.

The two lateral vertical elements can be optionally formed as frames having closed or open contour. The lateral vertical elements can be formed in any other suitable geometric shape, preferably as a panel-like lateral elements. The lateral vertical elements can be made of metal, plastic, medium density fibre board (MDF), solid wood, plywood, solid HPL, or other suitable material; their construction can be non-dismountable or dismountable.

When viewed from above the two lateral vertical elements can be preferably parallel to one another or to be located in an angle. The advantage of the latter position is that it

allows the lateral elements of the article in a position of a chair to go between the lateral elements of the article in a position of a desk, thereby allowing the two articles to be used as a set. The construction of the lateral elements of the article is such so as to allow it to stack in a position of a chair and in a position of a desk.

The two substantially flat elements can be made of solid wood; plywood; solid wood and plywood; medium density fiberboard (MDF); MDF and solid wood, solid HPL, or other suitable material.

For the sake of comfort for the transformation, it is possible to make a handle in one of the substantially flat elements.

The chair that transforms into a desk is preferably equipped with a fixing mechanism to ensure stability in either position, chair or desk, and to ease the transformation. The fixing mechanism serves as a positioning and locking device of the chair that transforms into a desk and vice versa, and can be mounted in the first substantially flat element, in the second substantially flat element or in the hinge joint.

According to a first preferable embodiment the fixing mechanism consists of a tie bar, joined to a spring at one of its ends; the other end is free. The tie bar is located perpendicularly to the top horizontal axis, passed above and holds it. At its other end, the spring is joined to the body of the first substantially flat element. The tie bar has an integrated blocking step. Mounted in the first substantially flat element are a blocking element and a release button, located in a special socket in the cover, above the step of the tie bar.

According to a second preferable embodiment the fixing mechanism consists of a locking pin, spring, located under the button, a slider which has a hole for the top horizontal axis to go. An axis goes through the slider, joined to which are two elastic bands. At their other end, the elastic bands are joined to the body. The spring holds the locking pin in a permanent locked position.

According to a third preferable embodiment of the fixing mechanism, it consists of the same elements like in the second embodiment, where however the elastic bands are replaced by a helical spring. At the one end the helical spring is joined to the axis of the hinge joint and at the other it is fixed to the body by means of a bush and pin. The axis of the hinge joint is fixed to the body of the second substantially flat element. The helical spring is tensed in such a way so as to keep the item in position desk. The transformation into position chair has to overcome the resistance of the spring. In the transformation to position desk, the spring helps the movement.

A fourth embodiment of the fixing mechanism according to the invention consists of a pin through which goes the top horizontal axis. The pin is blocked in a blocking step; an elastic band, joined to the body, goes through the pin.

The advantages of the furniture according to the invention have many aspects. According to preferred embodiments mentioned above the supporting construction is simple, light, robust and stable. The axes of the supporting construction take part in the process of transformation and facilitate it. As a result, the piece of furniture has a simple construction and ensures stability in its end positions as chair or desk. The transformation from a chair into a desk and vice versa can be achieved by a simple and quick movement without unscrewing or screwing anything. The construction of the furniture as a chair that transforms into a desk, subject to the invention, uses simple hinge joints and axes, thereby ensuring cheap and quick manufacturing. Due to its simple and light construction and easy transformation, the piece of furniture has a broad field of applications, e.g. conference halls, offices, training rooms, the home, public areas, etc., as well as toys. Another advantage of the invention is that the article can be made from any type of suitable materials used in the furniture industry.

In the following the invention, its function and advantages are further explained in detail by preferable embodiments with reference to the accompanying drawings.

In the drawings:

Figure 1 is a perspective view of a first embodiment of the transformable furniture according to the invention in the form of a chair;

Figure 2 is a perspective view of the first embodiment of the transformable furniture shown in Fig. 1 which has been transformed into a desk;

Figure 3 shows different views of the supporting construction of the furniture according to Figures 1 and 2;

Figure 3a is a front view of the supporting construction;

Figure 3b is a side view of the supporting construction;

Figure 3c is a top view of the supporting construction;

Figure 3d is a perspective view of the supporting construction;

Figure 4 is side view of the furniture according to Figures 1 and 2 showing the transformation from a chair into a desk (Figures 4a-4e);

Figure 5 is a perspective view of a second embodiment of the transformable furniture according to the invention in the form of a chair;

Figure 6 is a perspective view of the second embodiment of the transformable furniture shown in Fig. 5 which has been transformed into a desk;

Figure 7 shows different views of the supporting construction of the furniture according to Figures 5 and 6;

Figure 7a is a front view of the supporting construction;

Figure 7b is a side view of the supporting construction;

Figure 7c is a top view of the supporting construction;

Figure 7d is a perspective view of the supporting construction;

Figure 8 is side view of the furniture according to Figures 1 and 2 showing the transformation from a chair into a desk (Figures 8a-8e);

Figure 9 shows a first embodiment of the fixing mechanism used in the transformable furniture according to the invention;

Figure 9a is a side view of the fixing mechanism;

Figure 9b is a top view of the fixing mechanism.

Figure 9c is a perspective view of the fixing mechanism;

Figure 10 shows a second embodiment of the fixing mechanism used in the transformable furniture according to the invention;

Figure 10a is a side view of the fixing mechanism;

Figure 10b is a top view of the fixing mechanism.

Figure 10c is a perspective view of the fixing mechanism along with a separate enlarged view of the fixing mechanism;

Figure 11 illustrates the mounting principle of a furniture comprising a fixing mechanism according to the second embodiment;

Figure 12 shows a third embodiment of the fixing mechanism used in the transformable furniture according to the invention;

Figure 12a is a side view of the fixing mechanism;

Figure 12b is a top view of the fixing mechanism;

Figure 12c is a perspective view of the fixing mechanism along with a separate enlarged view of the fixing mechanism.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in Fig. 1 a chair consists of a supporting construction, comprising two lateral vertical elements, linked with two horizontal axes located at different levels, namely a top horizontal axis 2 and a bottom horizontal axis 3. The two lateral vertical elements 1 are

located in an angle. The lateral vertical elements are formed as metal pipe frame with trapezium shape if viewed from the side, resting on a pair of feet 12. In the upper part of the pipe frame there are armrests 11 made of plastic material. At the bottom front part of the metal pipe frame there is a special curve 15, which allows the article to be stacked. Two substantially flat elements, first substantially flat element 5 and second substantially flat element 6, linked with a hinge joint 4, are located in the space limited by the lateral vertical elements 1. The top horizontal axis 2 and the bottom horizontal axis 3 are parallel to one another and in relation to the axis of the hinge joint 4. The top horizontal axis 2 goes through the wall of the first substantially flat element 5, which can rotate around its axis. In a position of a chair the first substantially flat element 5 functions as a back and in a position of a desk, it functions as a desk top. The bottom horizontal axis 3 goes through the wall of the second substantially flat element 6, which can rotate around the same axis. In the position "chair" the second substantially flat element 6 is a seat and in the position "desk", it is a front panel. The wall of the first substantially flat element 5, which holds the top horizontal axis 2, has a slot 7, which allows the translation and rotating movement around axis 2. The chair has a fixing mechanism located in the first substantially flat element 5, covered with a cover on which button 9 is mounted. The second substantially flat element 6 has a handle 10, located near the hinge joint. The version is shown on Figures 1 to 4.

In another embodiment of the invention, shown on Figures 5 to 8, the lateral vertical elements 1.1 of the supporting constriction are formed as an open frame (Figure 7), whose one end is connected with the top horizontal axis 2, and the other, with the bottom horizontal axis 3.1, executed as two half-axes, mounted on the second substantially flat element 6.

One version of execution of the fixing mechanism 13, shown on Figure 9, consists of a tie bar 13.1.a, joined at one end to spring 13.1.b; the other end is free. The tie bar 13.1.a is located perpendicularly to the top horizontal axis 2, goes above it and holds it. At its other end the spring 13.1.b is joined to the body 5.1 of the first substantially flat element 5. The tie bar 13.1.a has an integrated blocking step 13.1.c. Mounted on the cover 5.2 of

the first substantially flat element 5 are a blocking element, which is not shown on the figures, and a release button 9, located in a special socket in the cover 5.2, above the step of the tie bar. Using the fixing mechanism it is possible to unlock the chair by pressing button 9, whereby the blocking step 13.1.c of the tie bar 13.1.a is unblocked from the blocking element and the transformation starts. The guiding parts 14 position the axis 2 in relation to the first substantially flat element 5.

A second version of the execution of the fixing mechanism, shown on Figure 10, consists of a locking pin 13.2.b, spring 13.2.a, located under button 9, slider 13.2.c, which has a hole for the axis 2 to go; axis 13.2.f which has two elastic bands 13.2.e, goes through the slider. The other end of the elastic band is joined to body 5.1. The spring 13.2.a holds the locking pin 13.2.b in permanent locked position. The unlocking takes place by pressing button 9 whereby the locking pin 13.2.b rotates around axis 13.2.f, unblocks from the slider 13.2.c and the transformation starts. The elastic band 13.2.e pulls substantially flat element 5 towards axis 2 and facilitates the movement until reaching an end position, chair or desk. When the end position is reached, substantially flat element 5 locks into position automatically.

A third version of the fixing mechanism, shown on Figure 11, consists of the same elements as in the second version, but the elastic bands 13.2.e are replaced with a helical spring 13.2.k. At the one end, the spring 13.2.k is joined to the axis 4 of the hinge joint, and at the other, it is fixed to the body 5.1 by means of bush 13.2.g and pin 13.2.h. The axis 4 is fixed to the body 6.1 of the second substantially flat element 6. The helical spring 13.2.k is tensed in such a way so as to keep the item in position desk. The transformation into position chair has to overcome the resistance of the spring. In the transformation to position desk, the spring helps the movement.

A fourth version of the fixing mechanism, shown on Figure 12 consists of a pin 13.3.a through which goes the top horizontal axis 2. The pin 13.3.a is blocked in a blocking step 13.3.c; an elastic band 13.3.b goes through the pin 13.3.a. The elastic band turns the pin around the top horizontal axis and the pin 13.3.a is blocked into the blocking step 13.3.c.

The elastic band 13.3.b holds the pin 13.3.a in permanent locked position. The unlocking takes place by pressing button 9 whereby the pin 13.3.a overcomes the blocking step 13.3.c and slides along plane B. The elastic band 13.3.b pulls substantially flat element 5 towards axis 2 and facilitates the movement until reaching an end position, chair or desk. When the end position is reached, substantially flat element 5 locks into position automatically.

In the transformation from a chair into a desk according to the invention, Figure 4 (Figure 4a – Figure 4e) and Figure 8 (Figure 8a – Figure 8e), the button 9 is pressed and held until the transformation starts; then it is released. The second substantially flat element 6 is lifted to end top position using handle 10. Here the second substantially flat element 6 rotates round the bottom horizontal axis 3 until it reaches the nearly vertical position of a front panel; at the same time, the first substantially flat element 5, with the help of the slot 7, moves in relation to the top horizontal axis 2, turns around it simultaneously and reaches end horizontal position as a desk top. After the transformation is complete, the fixing mechanism automatically locks into position the first substantially flat element 5.

In the transformation from a desk into a chair, the button 9 is pressed and held until the transformation starts; then it is released. By means of the handle 10 the second substantially flat element 6 is rotated round the bottom horizontal axis 3 until reaching the horizontal position of a seat. After the transformation is complete, the fixing mechanism automatically locks into position the first substantially flat element 5.

In the process of transformation, the slot 7 ensures the movement of the first substantially flat element 5 in relation to the top horizontal axis 2 and the rotation around it, while at the same time the second substantially flat element 6 turns around the bottom horizontal axis 3; the hinge joint ensures the leaning of the substantially flat elements towards each other and the distancing, or vice versa.

The chair that transforms into a desk can be used in conference halls, offices, training rooms, the home, public areas, etc., It ensures the availability of the necessary number of

chairs and desks depending on the concrete needs. It is suitable for use in the home and small-size terraces. Executed as a small model it can be used as a toy.

CLAIMS

1. An item of transformable furniture consisting of two substantially flat elements (5) and (6) connected with each other, which can switch over between a first position as a seat (6) and a back (5) and a second position as a front panel (6) and a worktop (5) and vice versa.
2. An item of transformable furniture according to claim 1, characterised in a supporting construction for the two substantially flat elements (5), (6) consisting of two linked lateral vertical elements (1) located at a distance from one another, where the two substantially flat elements are located between the two linked lateral vertical elements (1).
3. An item of transformable furniture according to claim 2, characterised in that the two linked lateral vertical elements (1) are formed as closed pipe frames with armrests (11) in the upper part of the frames or as open pipe frames without armrests.
4. An item of transformable furniture according to claim 2, characterised in that the linked lateral vertical elements (1) are formed as solid lateral vertical elements (1).
5. An item of transformable furniture according to claims 1 to 4, characterised in that the two substantially flat elements (5), (6) upon switching over from a first position to a second position and vice versa fall essentially in the same plane.
6. An item of transformable furniture according to claims 1 to 4, characterised in that the substantially flat elements (5) and (6) both in the first position and in the second position are at an angle to each other so that the first substantially flat element always has the function of horizontal or nearly horizontal seat (6) or vertical or nearly vertical front panel (6) and the second substantially flat element always has the function of vertical or nearly vertical back (5) or horizontal or nearly horizontal worktop (5).
7. An item of transformable furniture according to claims 1 to 6, characterised in that the substantially flat elements (5) and (6) are connected to each other by a horizontal hinge joint (4) and each substantially flat element can move round the respective horizontal axis (2) and (3) which are located at a different level and are parallel to each other and to the axis of the hinge joint (4).
8. An item of transformable furniture according to claim 7, characterised in that the substantially flat element (5) is connected to the top horizontal axis (2) by means of a slot which enables a rotation and translation movement of the substantially flat element in relation to the axis.
9. An item of transformable furniture according to claim 7 or 8, characterised in that the substantially flat element (6) is connected to the bottom horizontal axis (3) which goes through the substantially flat element, where the substantially flat element can rotate round the axis.
10. An item of transformable furniture according to claims 1 to 9, characterised in that the furniture is provided with a fixing mechanism for the substantially flat elements (5), (6).

11. An item of transformable furniture according to claim 10, characterised in that the fixing mechanism is located in the substantially flat element (5) or in the substantially flat element (6).
12. An item of transformable furniture according to claim 10, characterised in that the fixing mechanism is located in the hinge joint (4).

AMENDED CLAIMS

PCT/IB03/00158

AMENDED CLAIMS

[received by the International Bureau on 08 August 2003 (08.08.03);
original claims 1-12 replaced by new claims 1-9 (1 page)]

Amended Claims

1. An item of transformable furniture consisting of two plates (5, 6) connected with each other by a horizontal hinge joint (4), wherein the plates can rotate round horizontal axis (2, 3) located at different levels and in parallel to the axis of the hinge joint (4) so that the plates can switch over between a first position as a seat (6) and a back (5) and a second position as a front panel (6) and a worktop (5), respectively.
2. An item of transformable furniture according to claim 1, characterized by a supporting construction for the two plates (5, 6) consisting of two lateral vertical elements (1) linked together at a distance from one another, so that the two plates are located between said two linked lateral vertical elements (1).
3. An item of transformable furniture according to claim 2, characterized in that said two linked lateral vertical elements (1) are formed as closed pipe frames with armrests (11) in the upper part of the respective frame or as open pipe frame without armrests.
4. An item of transformable furniture according to claim 2, characterized in that said two linked lateral vertical elements (1) are formed as solid lateral vertical elements.
5. An item of transformable furniture according to one of claims 1 to 4, characterized in that the plate (5) serving as a back and worktop is connected to the top horizontal axis (2) by means of a slot (7) which enables a rotational and translational movement of the plate in relation to said axis.
6. An item of transformable furniture according to claim 5, characterized in that the plate (6) serving as a seat and front panel is penetrated by the bottom horizontal axis (3).
7. An item of transformable furniture according to one of claims 1 to 6, characterized by a fixing mechanism for fixing the angular position between said plates (5, 6).
8. An item of transformable furniture according to claim 7, characterized in that the fixing mechanism is located in one of said plates (5, 6).
9. An item of transformable furniture according to claim 7, characterized in that the fixing mechanism is located in the hinge joint (4).

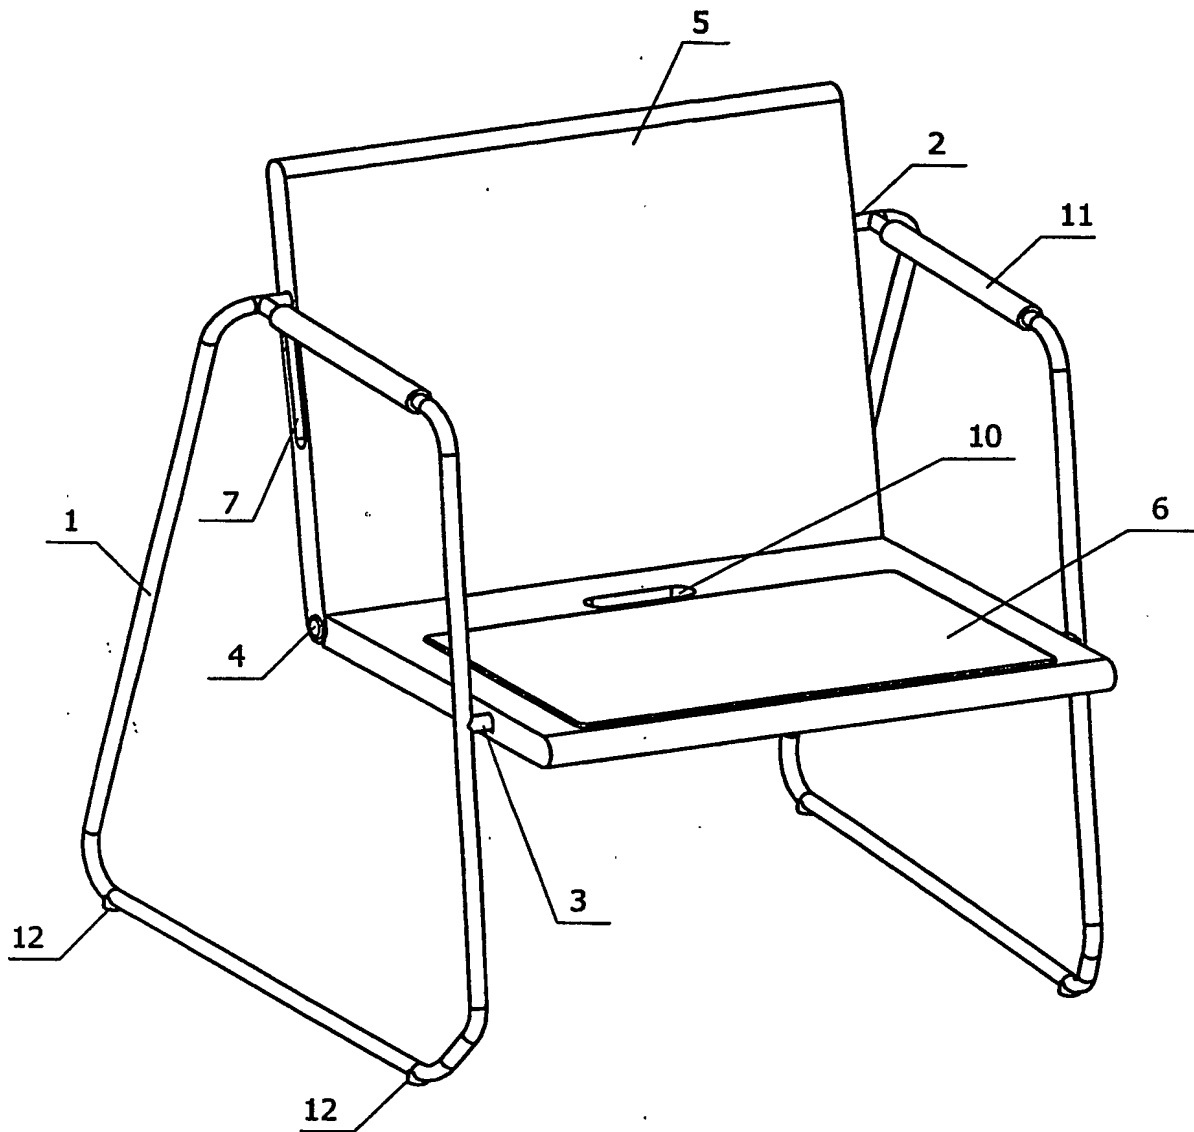


Figure. 1

2/12

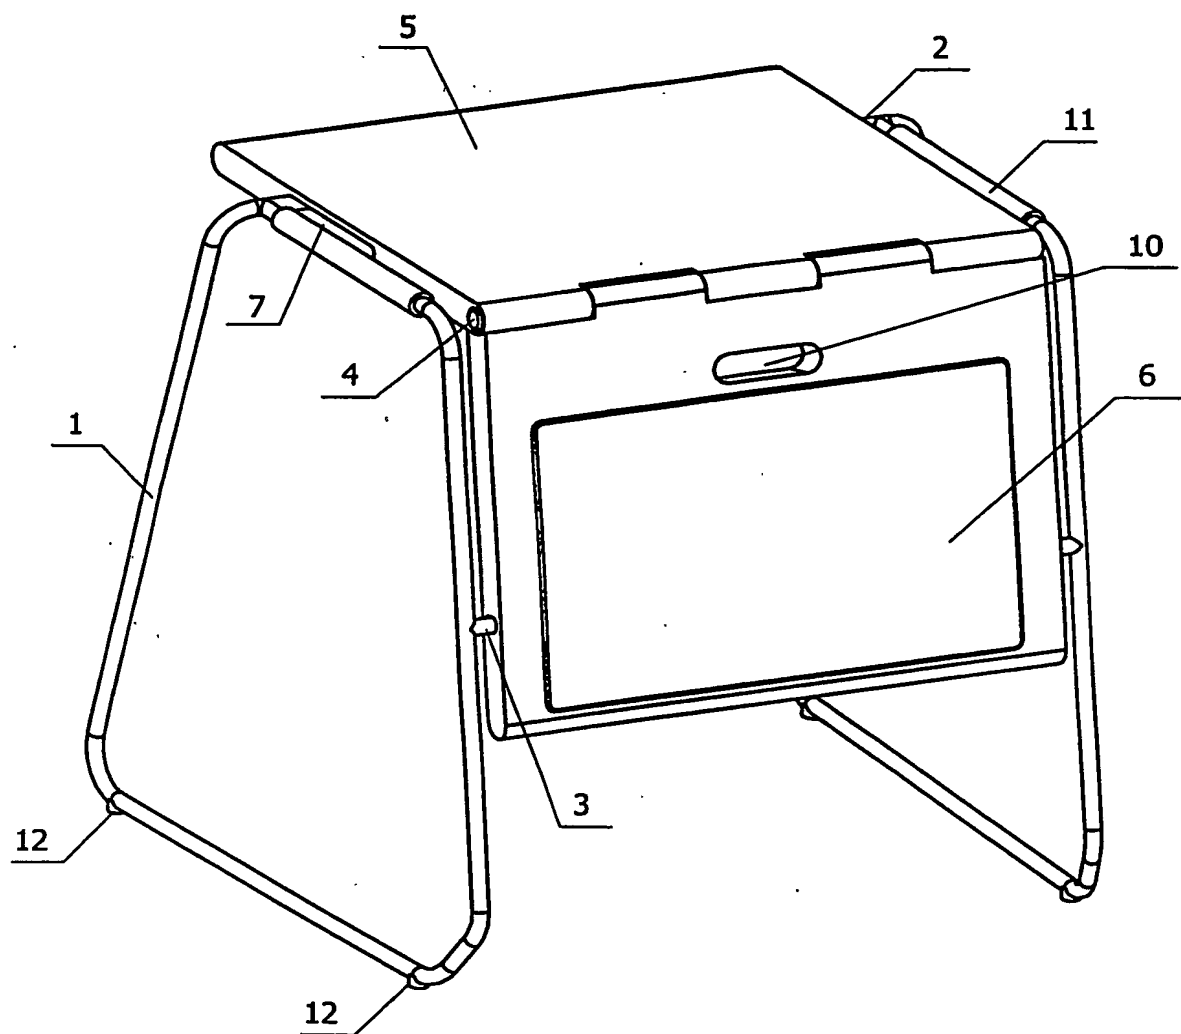


Figure. 2

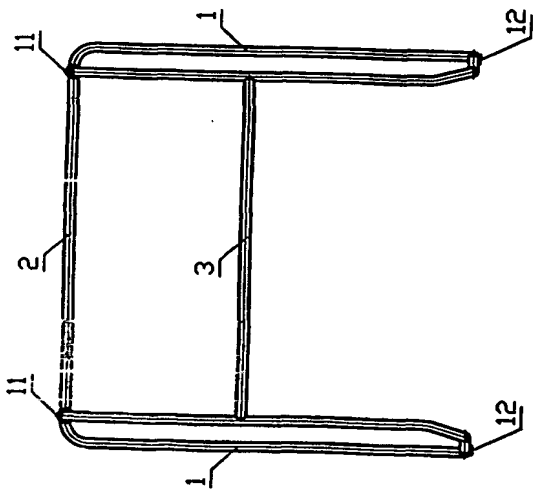


Figure.3a

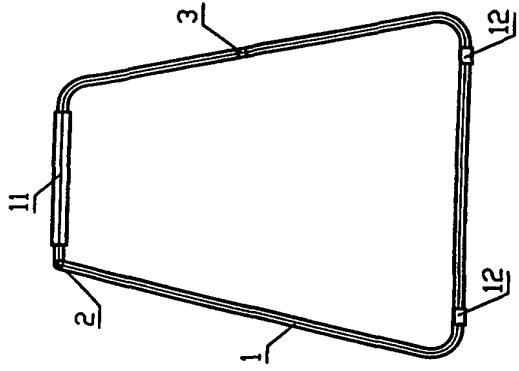


Figure.3b

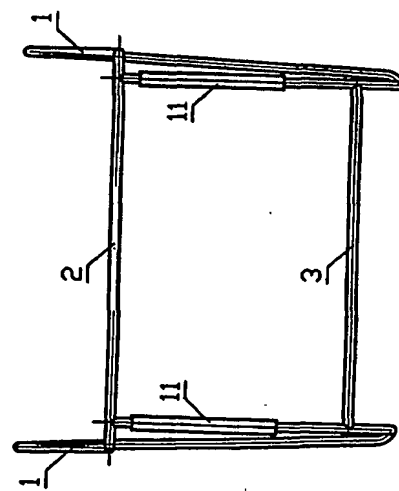


Figure.3c

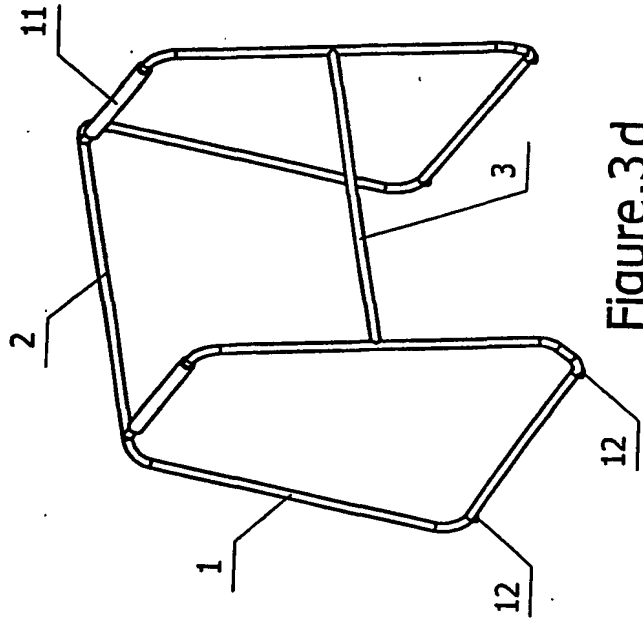


Figure.3d

Figure.3

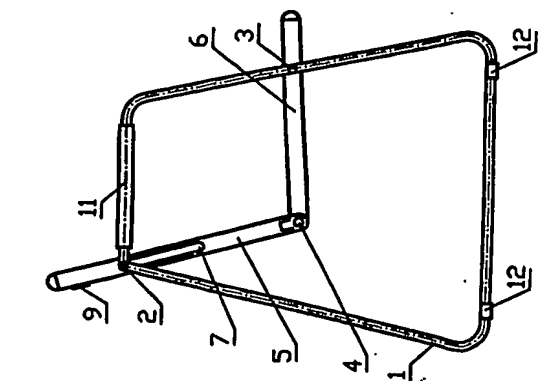


Figure.4a

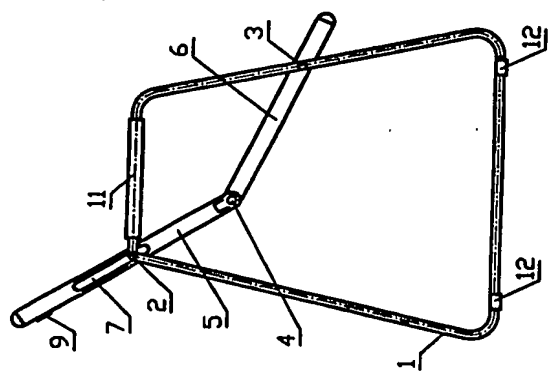


Figure.4b

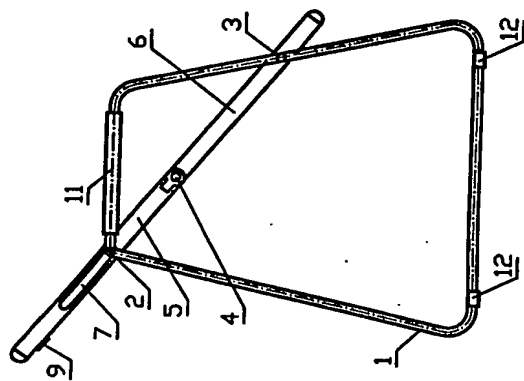


Figure.4c

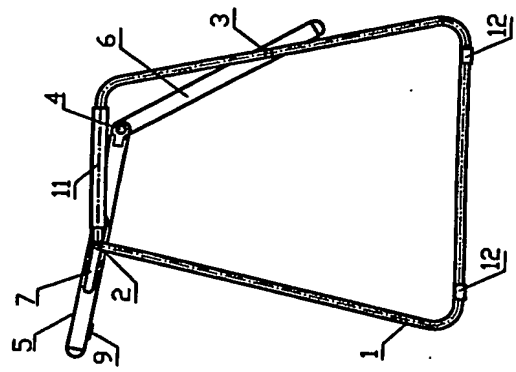


Figure.4d

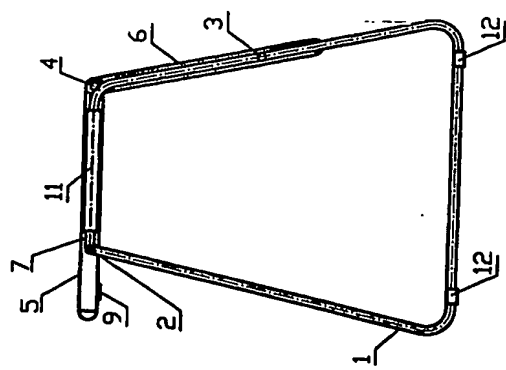


Figure.4e

Figure.4

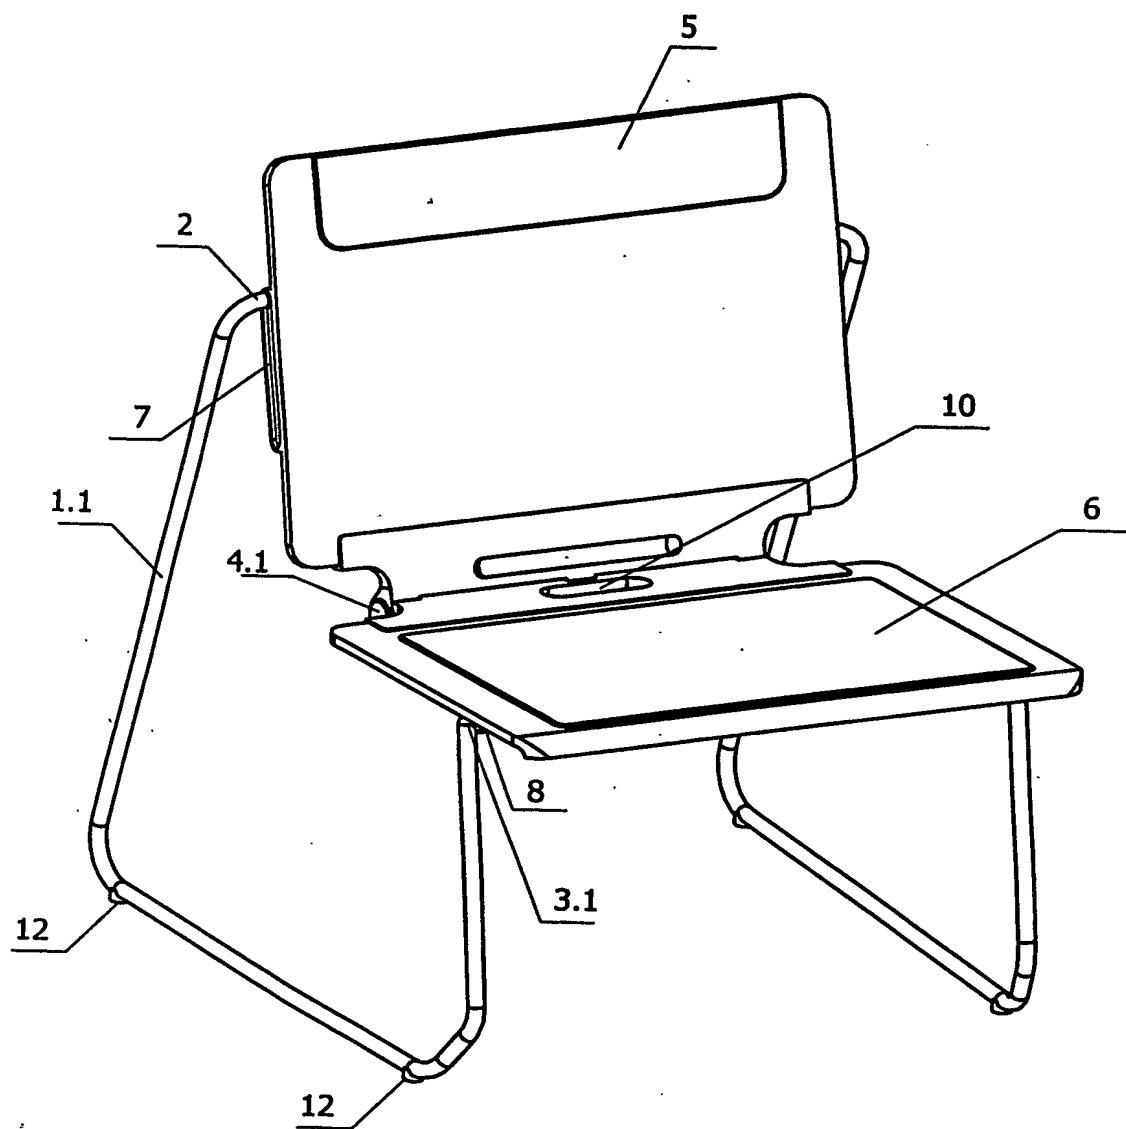


Figure.5

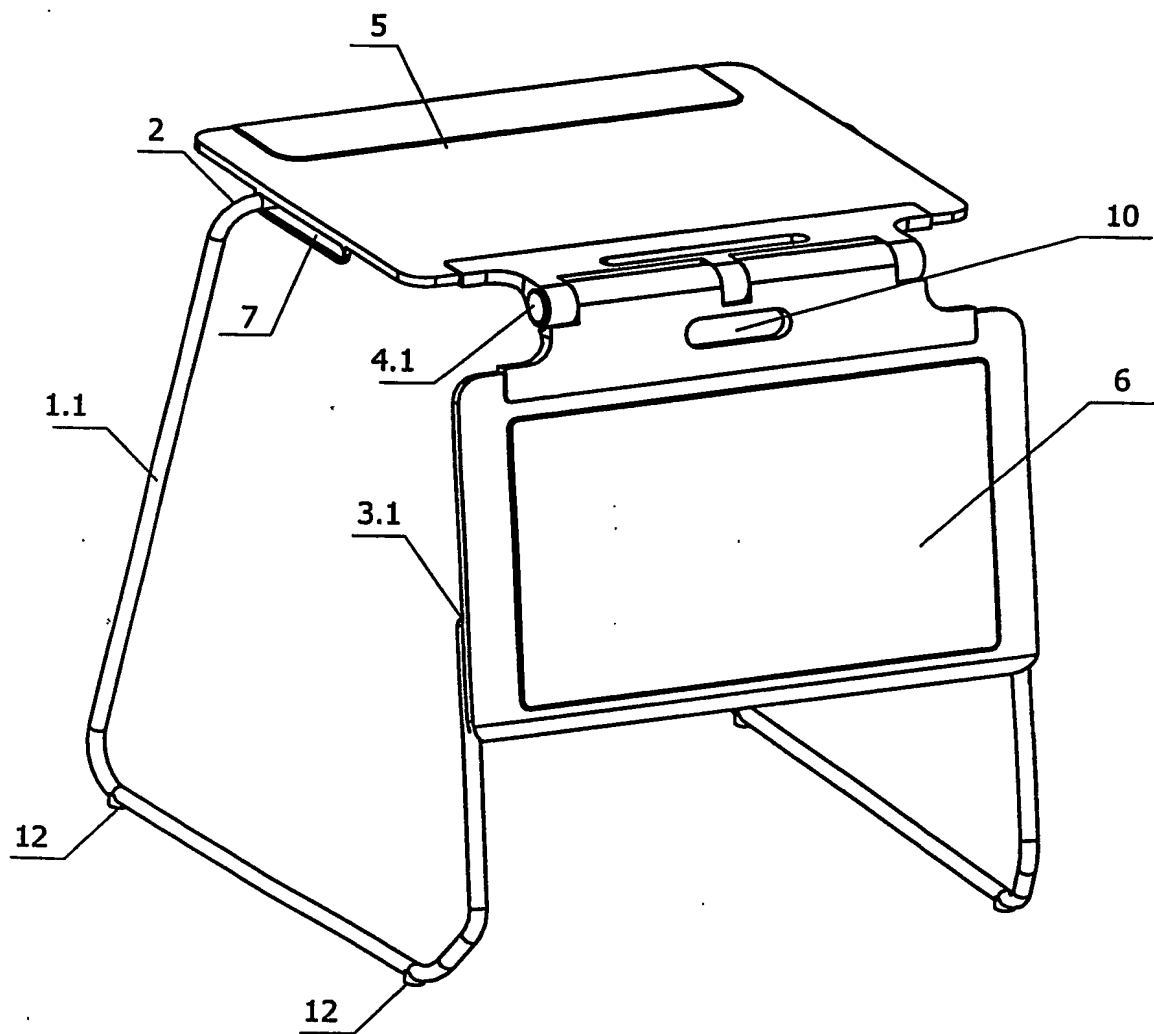


Figure. 6

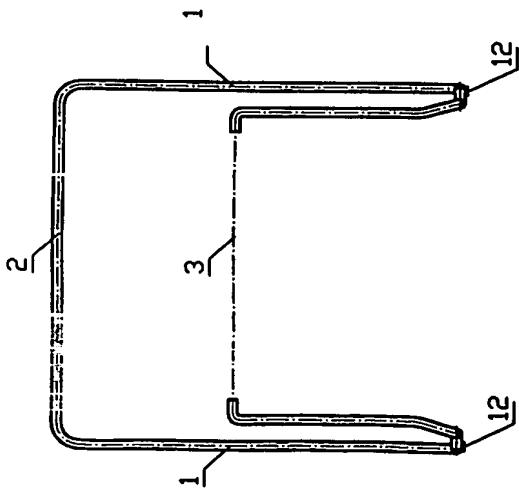


Figure 7 a

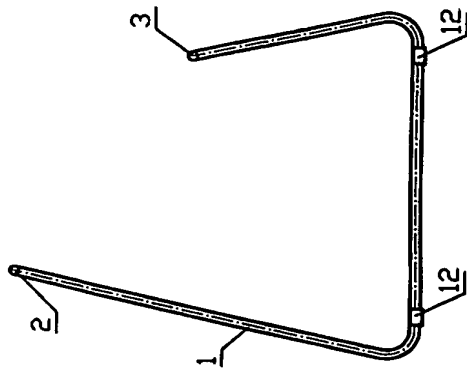


Figure 7 b

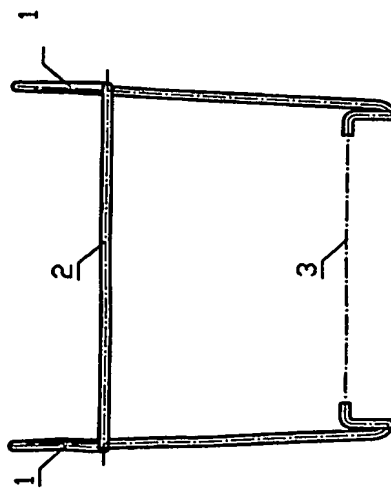


Figure 7 c

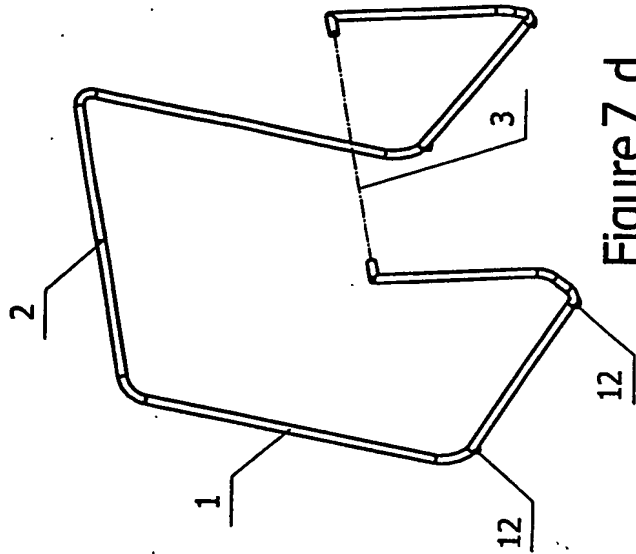


Figure 7 d

Figure. 7

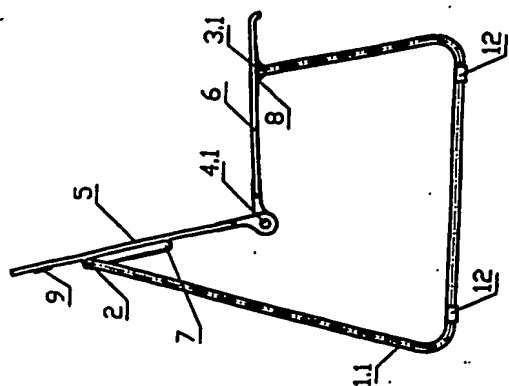


Figure.8a

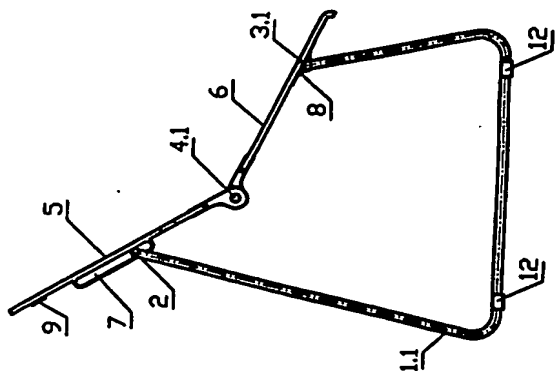


Figure.8b

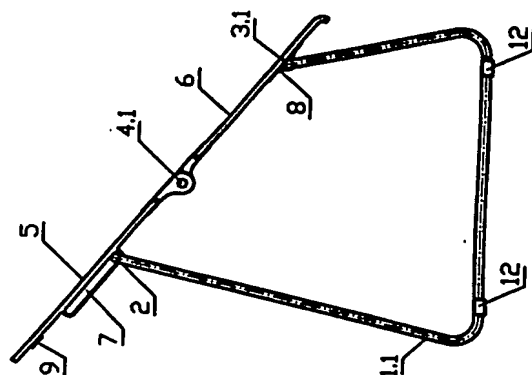


Figure.8c

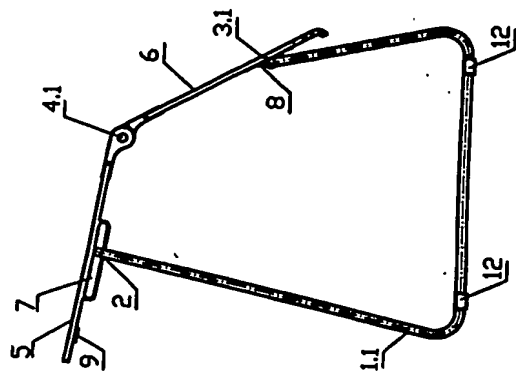


Figure.8d

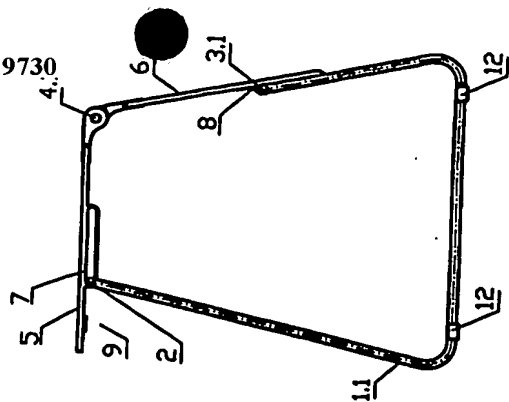


Figure.8e

Figure 9a

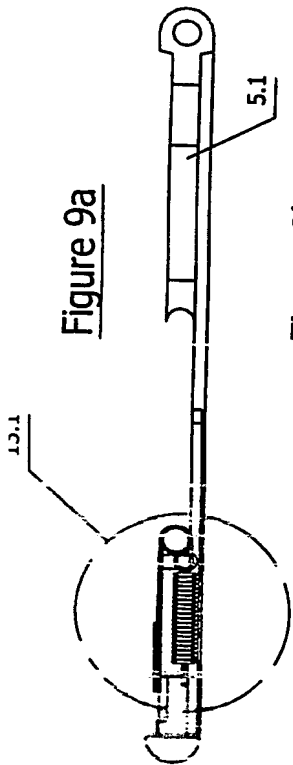


Figure 9b


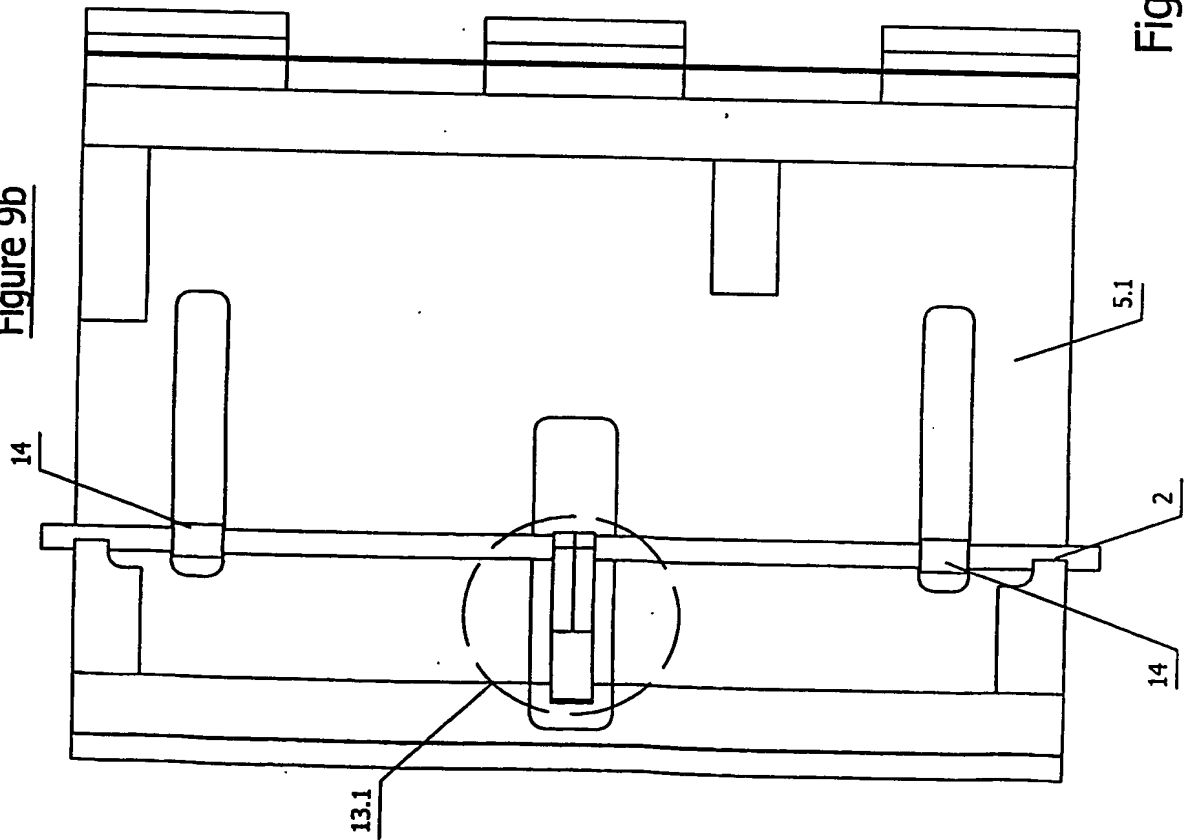


Figure 9c

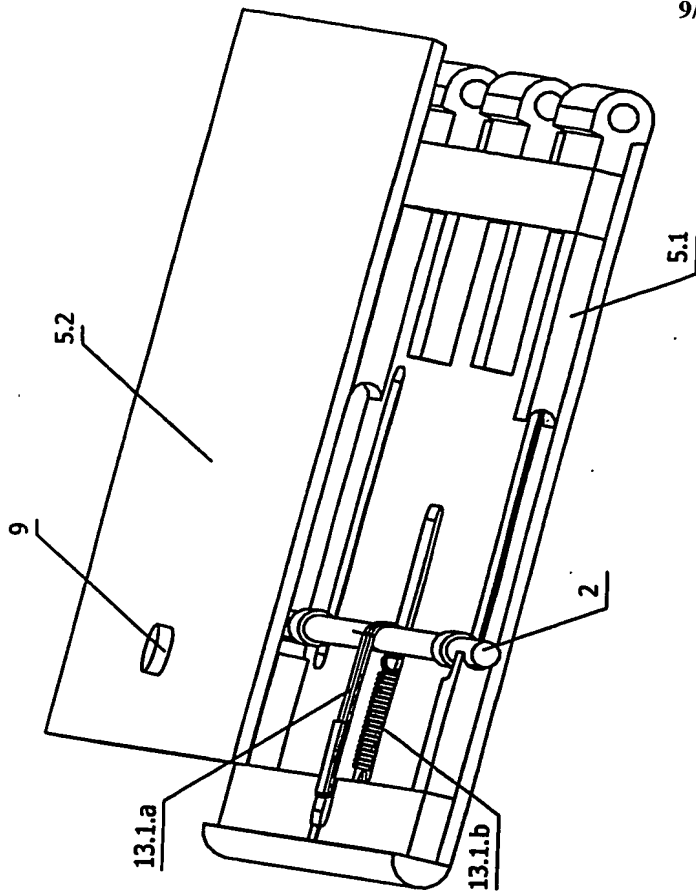

pos.13.1

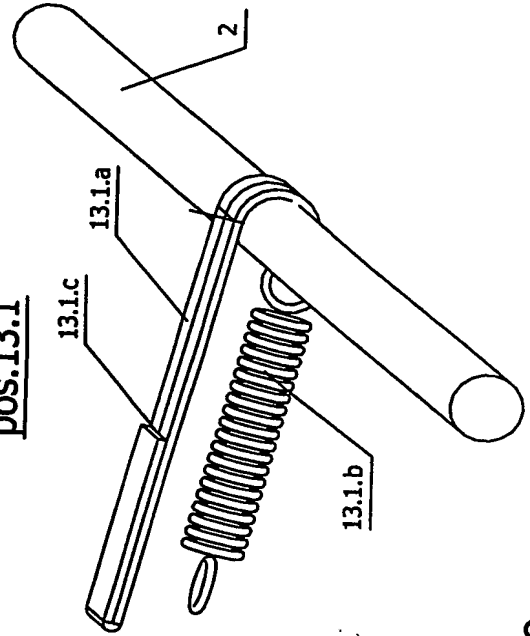


Figure 9

Figure 10a

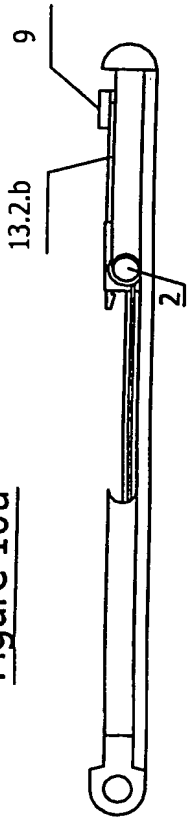


Figure 10b


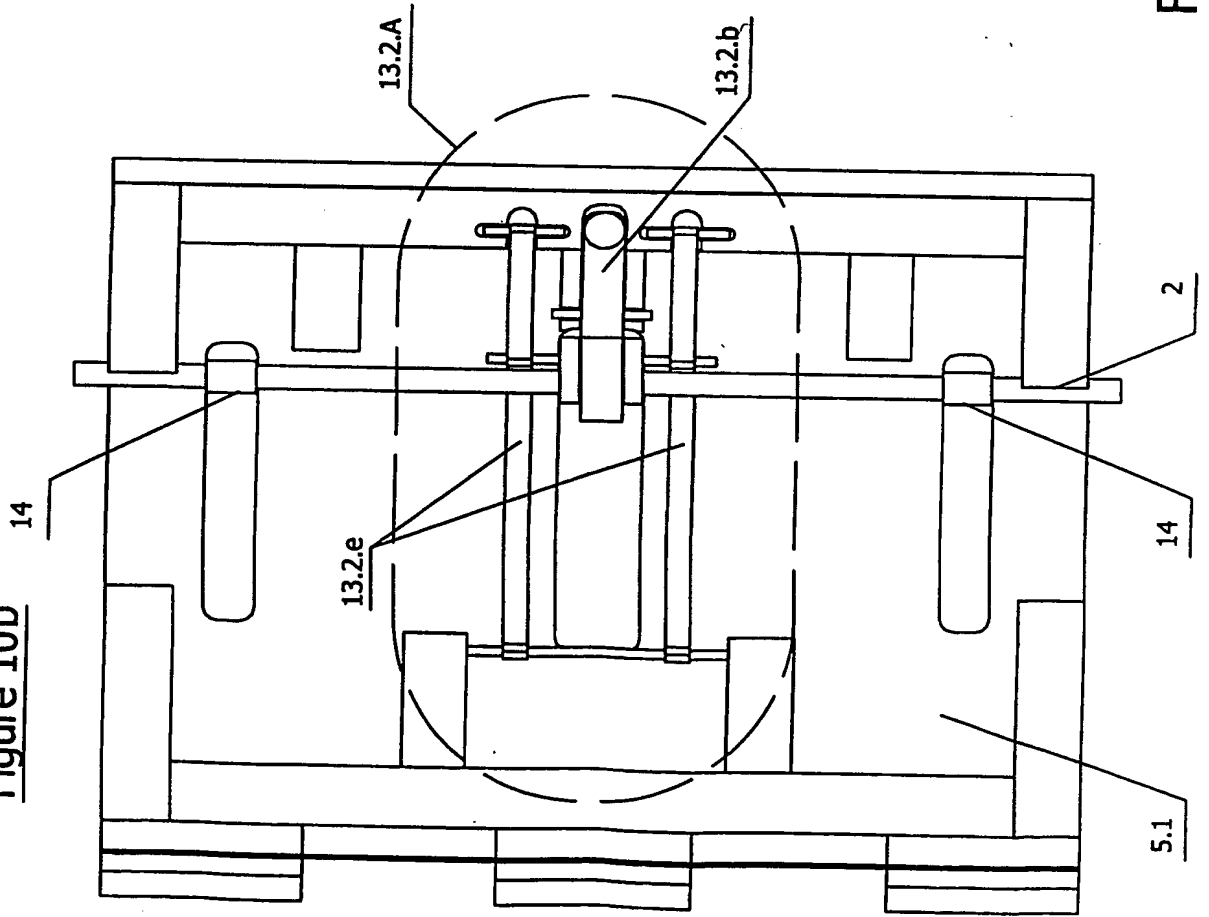


Figure 10c

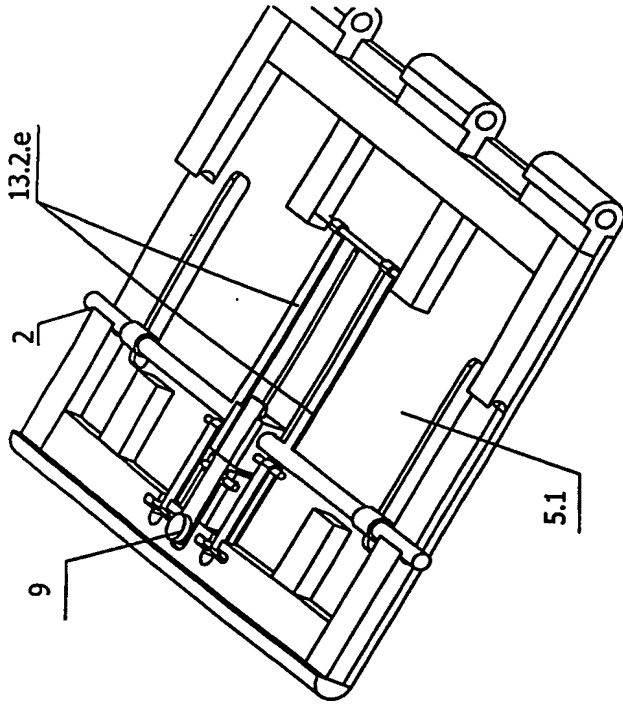

pos. 13.2.A

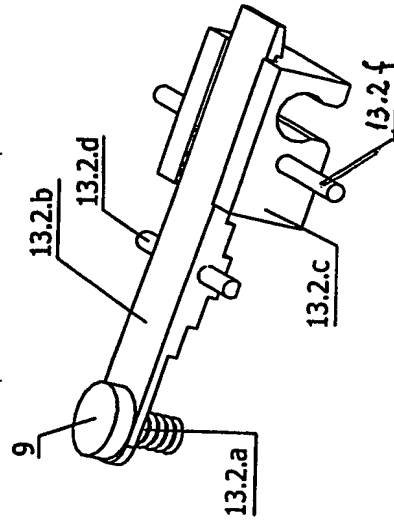


Figure 10

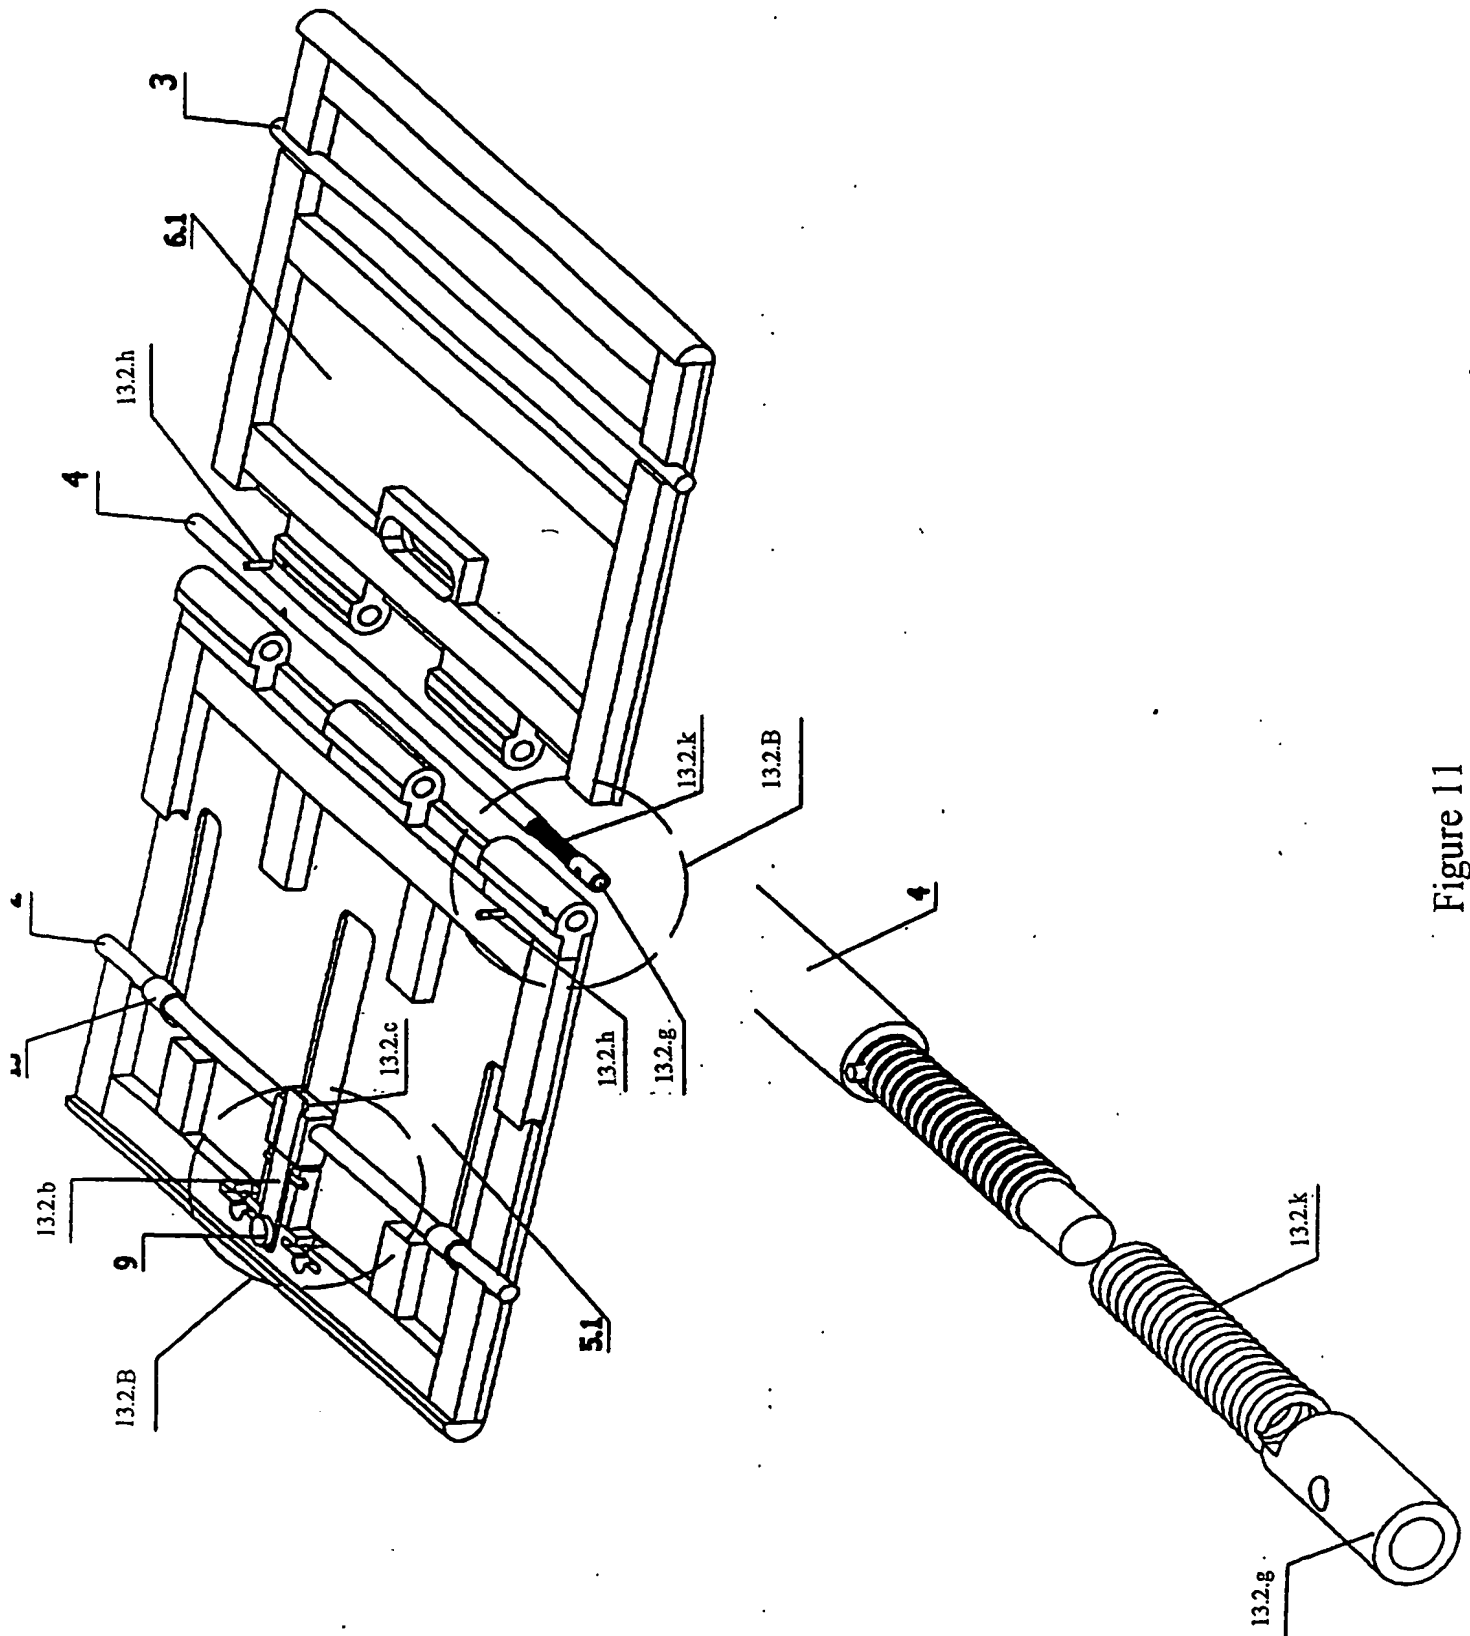


Figure 11

Figure 12a

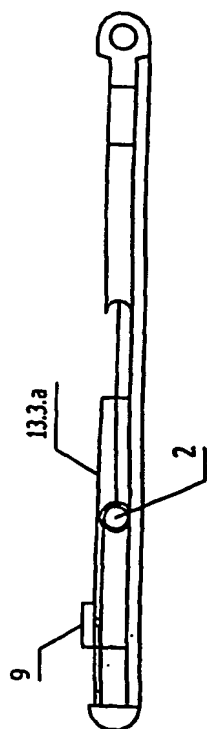


Figure 12b

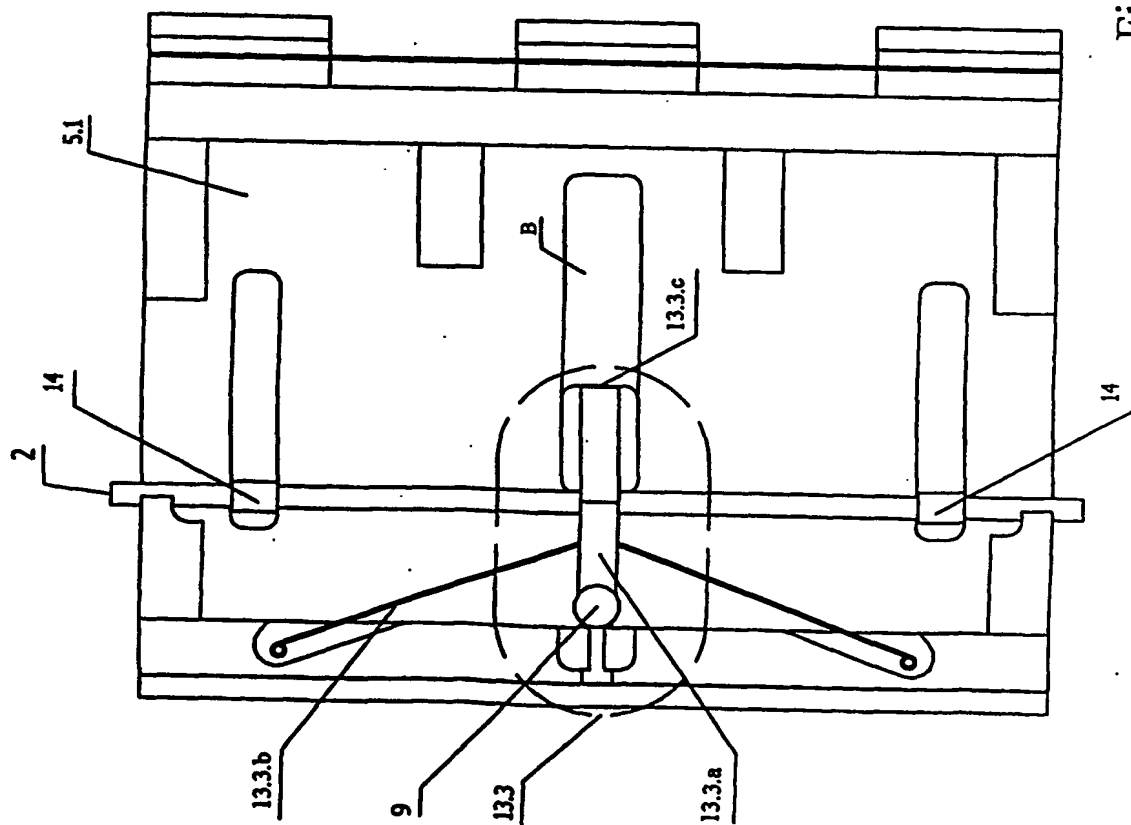


Figure 12c

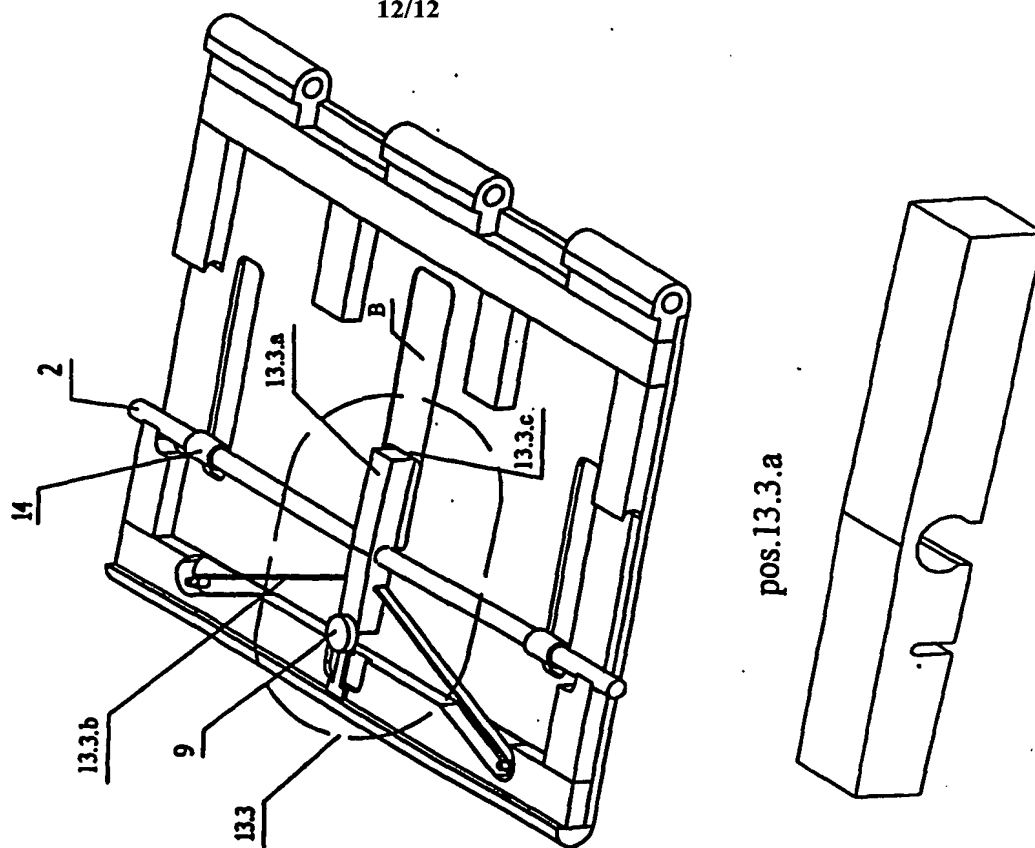


Figure 12

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB 03/00158

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A47B85/04 A47C13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 A47B A47C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 447 925 A (PUETZ GREGOR) 25 September 1991 (1991-09-25) the whole document	1, 2, 4-6
A	----	3
X	DE 296 12 131 U (HERBST CHRISTINA DIPL ING) 5 September 1996 (1996-09-05) the whole document	1
X	US 1 513 651 A (STONE TILDEN J) 28 October 1924 (1924-10-28) the whole document	1
A	----	7, 9
A	GB 195 545 A (EDWARD CHARLES HODGETTS; WILLIAM TALLIS BRASSINGTON) 5 April 1923 (1923-04-05) the whole document	8, 10-12

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

C document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

5 June 2003

Date of mailing of the international search report

17/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Ottesen, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB 03/00158

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0447925	A	25-09-1991	DE 4008765 A1 AT 133542 T DE 59107323 D1 DK 447925 T3 EP 0447925 A2	26-09-1991 15-02-1996 14-03-1996 09-04-1996 25-09-1991
DE 29612131	U	05-09-1996	DE 29612131 U1	05-09-1996
US 1513651	A	28-10-1924	NONE	
GB 195545	A	05-04-1923	NONE	